

**PLANTING SCHEDULE**

- A Silver Birch 1.5 - 1.8m whip
- B Rowan 1.5 - 1.8m whip
- C Scots pine 1.0m whip
- beech hedge



Planting should be carried out within the planting season (typically October to March) subject to various species and weather conditions.

Trees should be planted and staked within one week of collection from nursery. When planting roots of trees should be healed into the ground to avoid air pockets. Tree protection should be securely fitted in accordance with manufacturers recommendations.

Area around stem to be cleared 1m in diameter. A slow release general fertiliser should be used. Planting pit should be at least 100mm deeper and wider than root system.

Trees to be secured with minimum 750mm in diameter, pointed at lower end softwood stakes and secured with rubber ties. Trees to be protected against damage by rabbits and livestock with close mesh fencing. The base of the trees to be mulched with 75mm deep bark chippings.

Trees to be checked at least twice a year with guards, stakes and ties replaced and repaired where necessary.

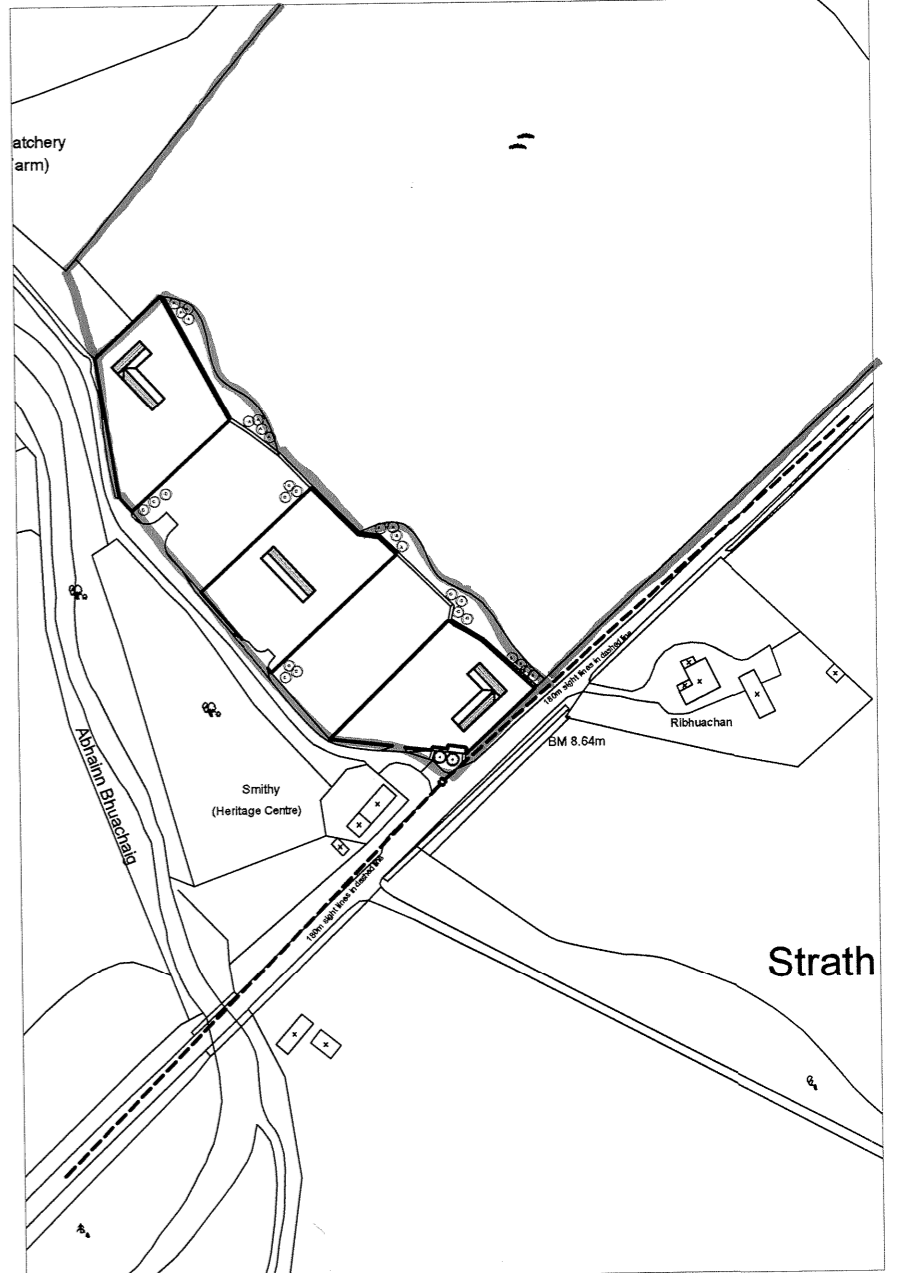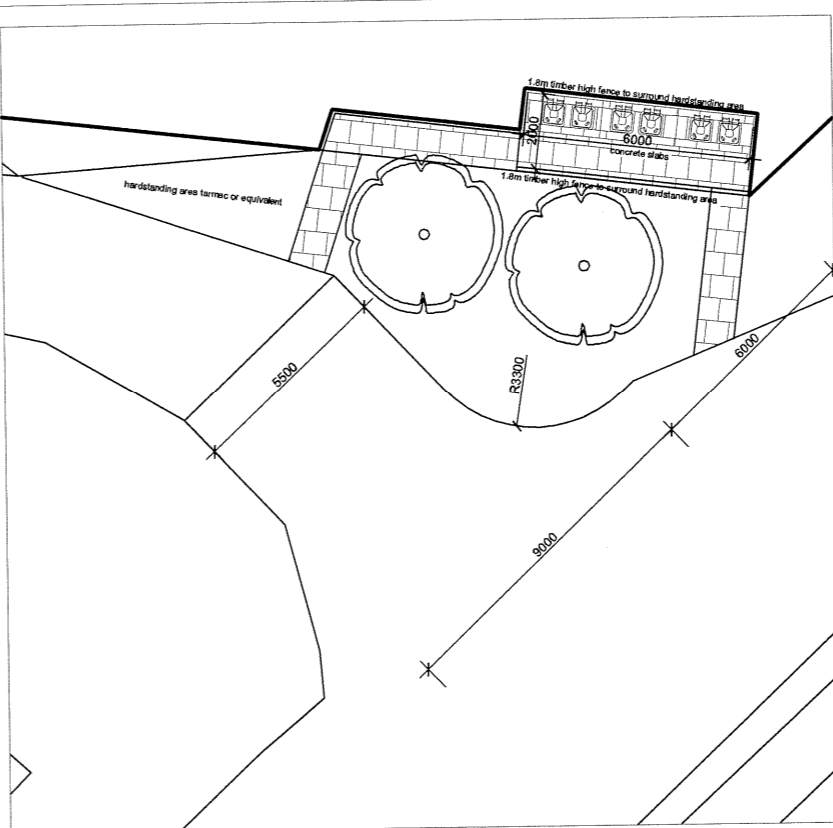

location plan 1:2500

**PLANNING issue**

revisions  
A- Alterations to layout and access road 03/04/10

**APPROVED**  
9th July 2010

RECEIVED 11 MAY 2010

reynolds architecture ltd.  
1 tulloch street, dingwall. IV15 9JY  
tel. 01349 867766 fax. 01349 867769  
www.reynolds-architecture.com

Sites at Lochcarron  
at Lochcarron  
for Conon Brae Farms

drawing description	
Site proposals	
drawing number	revision
2009 058-000-A	A
scale	date
NTS	19/10/09
drawn	

1. Protected by copyright, no reproduction without express permission from architect.  
2. Contractor is responsible for checking all dimensions prior to construction.  
3. Discrepancies to be referred to architect for decision.



site plan 1:500